


1. Shape & Dimensions (mm)

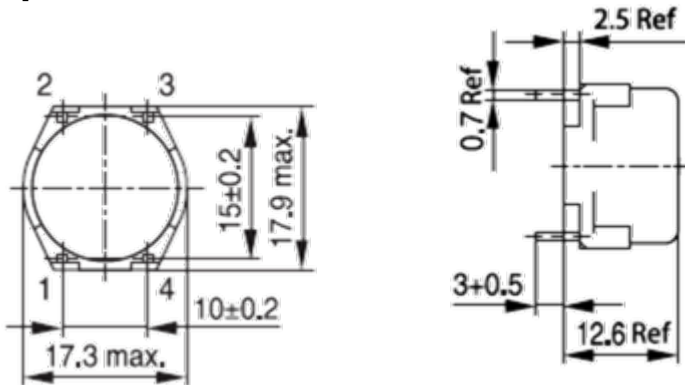


2. Material List

Item	Material
Bobbin	Bakelite Skeleton
Core	Ferrite
Wire	Copper
Varnish	V1630FS

Manufacturer information and UL ILE numbers for all materials available upon request

3. Electrical Properties



Part Number	Inductance (mH)±30%	Test Condition	Rated Current (A) Max	Resistance (Ω) Max	Test Voltage
PVT-LC1713-701N	0.7	10KHZ/0.1V	4	0.03	1500V, 50HZ/2 S
PVT-LC1713-102N	1	10KHZ/0.1V	2	0.06	1500V, 50HZ/2 S
PVT-LC1713-222N	2.2	10KHZ/0.1V	2	0.1	1500V, 50HZ/2 S
PVT-LC1713-332N	3.3	10KHZ/0.1V	1.5	0.15	1500V, 50HZ/2 S
PVT-LC1713-682N	6.8	10KHZ/0.1V	1	0.3	1500V, 50HZ/2 S
PVT-LC1713-103N	10	10KHZ/0.1V	0.7	0.55	1500V, 50HZ/2 S
PVT-LC1713-153N	15	10KHZ/0.1V	0.5	0.85	1500V, 50HZ/2 S
PVT-LC1713-273N	27	10KHZ/0.1V	0.4	1.2	1500V, 50HZ/2 S
PVT-LC1713-393N	39	10KHZ/0.1V	0.4	1.7	1500V, 50HZ/2 S

Remarks:

- Operating temperature (not including self-generated heat): -40°C +85°C
- Storage temperature (not including self-package): -40°C +125°C