



1. Shape & Dimensions (mm)

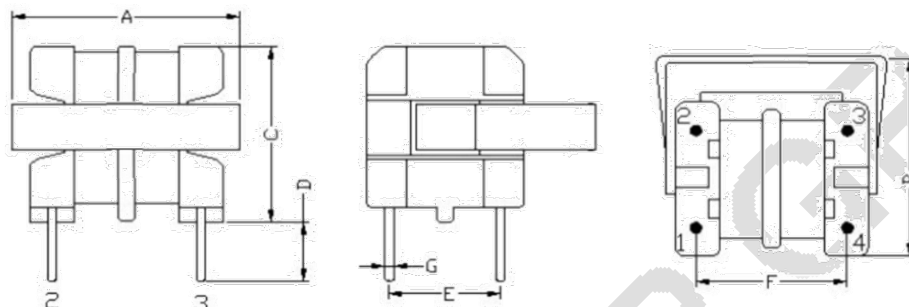

Item	A	B	C	D	E	F	G
Size(mm)	18.5 Max	19 Max	16 ± 0.5	3.5 ± 0.5	10±0.3	13±0.3	0.7±0.2

2. Electrical Properties

W1 ϕ 0.3mm
*100T±5T



W2 ϕ 0.3mm
*100T±5T

Testing Item		Standard
Inductance	W1, W2	12mH-22.5mH @10KHz 0.05V SER @25°C
Dotted Terminals		1, 4
Turn Ratio	W1, W2	1:1
Hi-Pot	W1, W2	No breakdown 500VAC 1mA 2S
	Coil to Core	No breakdown 500VAC 1mA 2S

3. Material List

Item	Description
Bobbin	UU10.5
Core	UU10.5
Wire	155° ϕ 0.3
Tape	FW
Soldering	
Varnish	V1630FS
Core-Tightening Clip	Steel

Manufacturer information and UL ILE numbers for all materials available upon request